


External Sensor ESD-A5

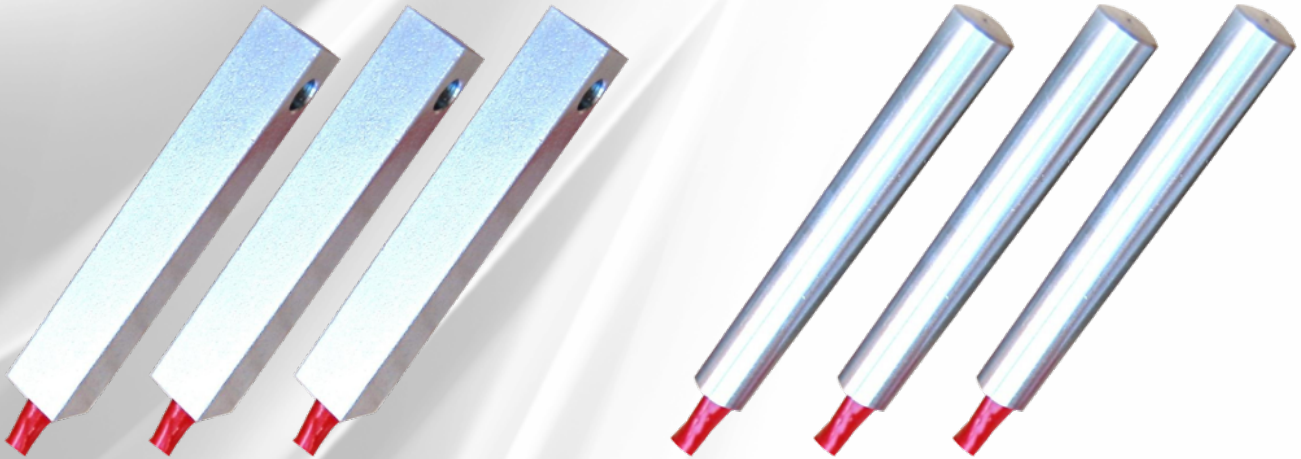

Features

- ▶ Highly resistant against corrosion, pitting and a multitude of chemicals
- ▶ Hermetically sealed by a thermally conductive potting compound
- ▶ Prismatic stainless steel housing with a 4 mm mounting bore for fitting to measurement object
- ▶ Cylindrical stainless steel housing for feeler application
- ▶ To be used with sensor control unit **SCU 800** or d-LISTcontroller
- ▶ May be combined with d-LIST sensor cable **SEC 15**
- ▶ Maximum number of external sensors each for inputs **A / B** of a sensor control unit **SCU 800** or d-LISTcontroller:
Up to 50 external sensors with a total cable length of up to 100 m
From 51 to 99 external sensors with a total cable length of up to 50 m
In combination with sensor cable **SEC 15** four external sensors at each sensor cable end with a total cable length of up to 200 m

General Data

- ▶ Operating temperature: -40 °C ... +85 °C, up to +120 °C short term
- ▶ Ingress protection: IP 64
- ▶ Housing material: Material no. 1.4571 (DIN EN X6 CrNiMoTi 17-12-2)
- ▶ Cable isolation material: FEP (Fluorinated Ethylene Propylene)
- ▶ Storage Conditions: 0 °C ... +60 °C, 30% ... 70% relative humidity, non condensing, prevention against shock, vibration, dust, electrostatic discharge **ESD**, **UV** light

Sensor Specifications

- ▶ Measurement range: -40°C ... +120 °C
- ▶ Measurement resolution: 0,0625 °C, output via protocol interface 0,1 °C
- ▶ Repeatability: ± 0,0625 K, output via protocol interface ± 0,1 K
- ▶ Power supply: 5 V DC via sensor control unit **SCU 800** or d-LISTcontroller



Ordering Information

- | | | |
|--|-----------|---------------|
| ▶ External sensor ESD-A5-EL-01 (1 m connection cable, prismatic) | Art.-no.: | G00343 |
| ▶ External sensor ESD-A5-EL-02 (2 m connection cable, prismatic) | Art.-no.: | G00344 |
| ▶ External sensor ESD-A5-EL-03 (3 m connection cable, prismatic) | Art.-no.: | G00345 |
| ▶ External sensor ESD-A5-EL-04 (4 m connection cable, prismatic) | Art.-no.: | G00453 |
| ▶ External sensor ESD-A5-EL-05 (5 m connection cable, prismatic) | Art.-no.: | G00346 |
| ▶ External sensor ESD-A5-EL-10 (10 m connection cable, prismatic) | Art.-no.: | G00499 |
| ▶ External sensor ESD-A5-RL-01 (1 m connection cable, cylindrical) | Art.-no.: | G00347 |
| ▶ External sensor ESD-A5-RL-02 (2 m connection cable, cylindrical) | Art.-no.: | G00348 |
| ▶ External sensor ESD-A5-RL-03 (3 m connection cable, cylindrical) | Art.-no.: | G00349 |
| ▶ External sensor ESD-A5-RL-04 (4 m connection cable, cylindrical) | Art.-no.: | G00454 |
| ▶ External sensor ESD-A5-RL-05 (5 m connection cable, cylindrical) | Art.-no.: | G00350 |
| ▶ External sensor ESD-A5-RL-10 (10 m connection cable, cylindrical) | Art.-no.: | G00498 |

Scope of Delivery

- ▶ External sensor with connection cable, length according to order
- ▶ Production file

Dimensions

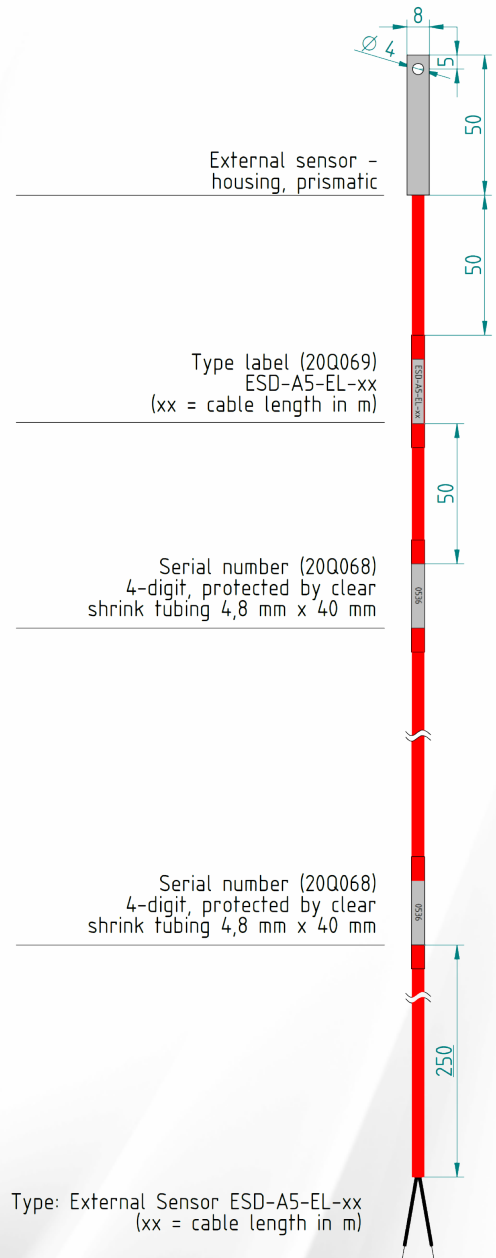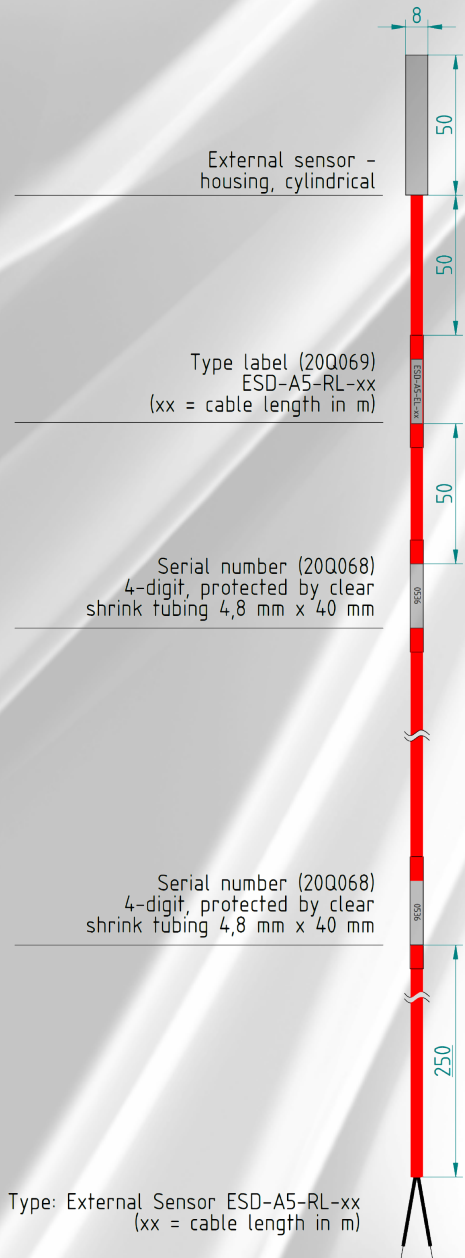

LISTEC GmbH
Am Sandberg 34
D - 84424 Isen
Germany

Tel.: +49 (0) 8083 5385-0
Fax.: +49 (0) 8083 5385-20
e-mail: info@listec-gmbh.de
www.listec-gmbh.de

A company of the Swiss Securitas Group
Subject to change without prior notice!